


Ultra Precision Power Resistor (10 Watts)

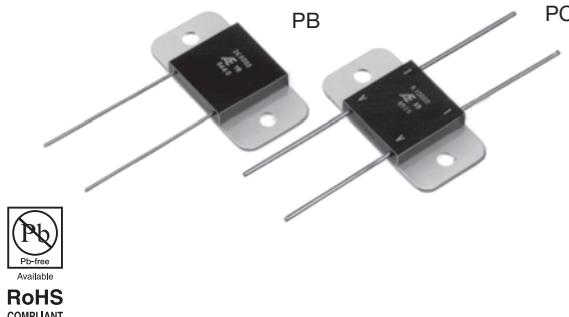

RoHS

COMPLIANT

COMPOSITION OF TYPE NUMBER			
Example:			
PB X 50R000 B			
		Tolerance	
		Resistance Value	
		TCR	
		Type	
Resistance value, in ohm, is expressed by a series of six characters, five of which represent significant digits. R or K is a dual-purpose letter that designates both the value range (R for ohmic; K for kilo-ohm) and the location of decimal point.			


CONFIGURATION (DIMENSIONS IN mm)		
PB		Schematic of PC
PC		4-Terminal Connection
Type	PB	PC
L	40.0±0.2	
L ₁	20.0±0.2	
L ₂	30.0±0.5	
W	20.0±0.2	
T	5.0±0.2	
T ₁	1.0±0.1	
F	15.0±0.5	
l	30±10	
D	Dia. 4.0	
d	Dia. 0.8±0.05	Dia. 1.2±0.05

TCR, RESISTANCE RANGE, TOLERANCE, RATED POWER				
Type	TCR (ppm/°C) -25°C to 125°C*	Resistance Range (Ω)	Resistance Tolerance (%)*†	Rated Power (W) at 25°C
PB	0±15 (W) 0±5 (X) 0±2.5 (Y)	0.4 to 1	1 to ±5 (F, G, J)	2 in free air and 10 On heat sink **
		1 to 5	±0.5 to ±5 (D, F, G, J)	
		5 to 10	±0.1 to ±5 (B, D, F, G, J)	
		10 to 25	±0.05 to ±5 (A, B, D, F, G, J)	
		25 to 50	±0.02 to ±5 (Q, A, B, D, F, G, J)	
		50 to 50k	±0.01 to ±5 (T, Q, A, B, D, F, G, J)	
PC	0±15 (W) 0±5 (X) 0±2.5 (Y)	0.002 to 0.05	±0.5 to ±5 (D, F, G, J)	
		0.05 to 0.1	±0.5 to ±5 (D, F, G, J)	
		0.1 to 5	±0.1 to ±5 (B, D, F, G, J)	
		5 to 10	±0.05 to ±5 (A, B, D, F, G, J)	
		10 to 25	±0.02 to ±5 (Q, A, B, D, F, G, J)	
		25 to 100	±0.01 to ±5 (T, Q, A, B, D, F, G, J)	

* Symbols in parentheses are for type number composition.

† Resistance figures for type PB are the values obtained by measuring the leads at point 12.7±3.2 mm away from the root, but in case of resistance below 10 ohm, the values at 5.08±0.6 mm away.


** For heat sinking, an aluminum chassis in 152.4 (L) x 101.6 (W) x 50.8 (H) x 1.0 mm (T) shall be used.

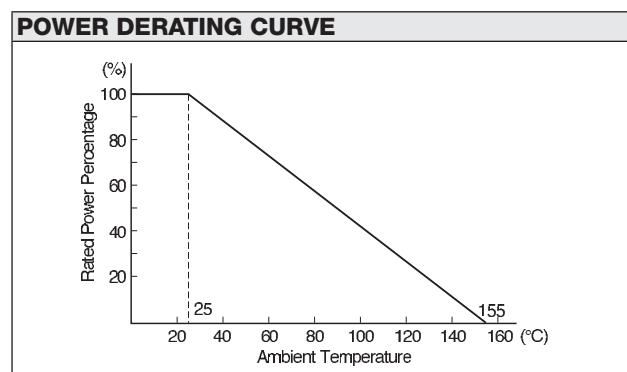


PERFORMANCE

Parameters	Test Condition	MIL-R-39009 Specification	ALPHA Typical Test Data
Maximum Rated Operating Temperature		25°C	
Working Temperature Range		-55°C to +155°C	
Maximum Working Voltage		750V	
Maximum Working Current		PB=5A, PC=32A	
Power Conditioning	25°C, Rated Voltage, 96 hrs.	±0.2%	±0.2%
Low Temperature Storage	-55°C, No Load, 24 hrs.	±0.3%	±0.005%
Dielectric Withstanding Voltage	Atmo. Pres.: AC 1 KV, 1 min. Baro. Pres. 8 mHg: AC 500V, 1min.	±0.2%	±0.005%
Insulation Resistance	DC 500V, 2 min.	over 10,000 MΩ	over 10,000 MΩ
Low Temperature Operation	-55°C, Rated Voltage	±0.3%	±0.005%
Overload	Rated Voltage x 2.5, 5 sec.	±0.3%	±0.01%
Moisture Resistance	+65°C to -10°C, 90% RH to 98% RH, Rated Voltage, 10 cycles (240 hrs.)	±0.5%	±0.05%
Terminal Strength	2.27 kg (5 pounds), 10 sec.	±0.2%	±0.005%
Shock	100G, 6 ms., Sawtooth Wave, X, Y, Z, each 3 shocks	±0.2%	±0.005%
Vibration, High Frequency	20G, 10 Hz to 2,000 Hz to 10 Hz, 20 min., X, Y, Z, each 4 hrs.	±0.2%	±0.005%
Life	25°C, Rated Power, 1.5 hr. - ON, 0.5 hr. - OFF, 2,000 hrs.	±1.0%	±0.01%
High Temperature Exposure	155°C, No Load, 2,000 hrs.	±1.0%	±0.01%
Solderability	245°C, 5 sec.	over 95% coverage	

FREQUENCY CHARACTERISTICS

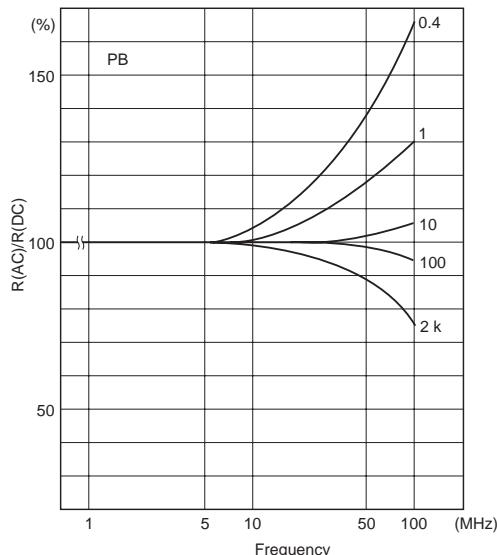


TEMPERATURE OF RESISTOR SURFACE

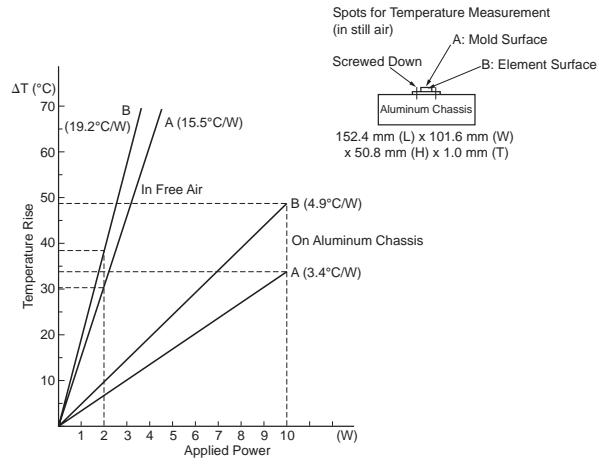

FOUR-TERMINAL RESISTOR

For low ohmic resistor (less than 10 ohm), the resistance value and TCR of the copper lead increases overall resistance value. Four-terminal (Kelvin) connection is recommended per the following figure. Loading current at terminals (V) causes measurement error.

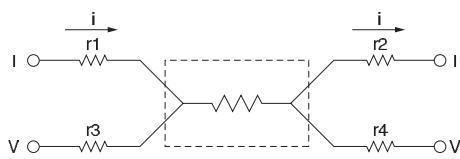

AFFECT OF PB TYPE LEAD FOR RESISTANCE VALUE AND TCR

